


ILLUMALETTER® BESPOKE PREMIUM LIFT IDENTIFICATION

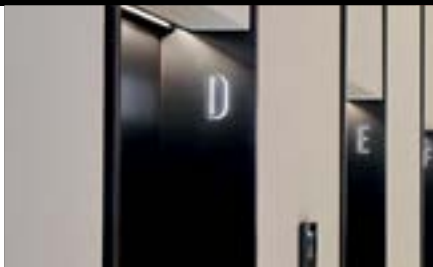

ILLUMALETTER® IS THE PERFECT ILLUMINATION SOURCE FOR LIFT DESTINATION CONTROL SYSTEMS REQUIRING PRESTIGIOUS LIFT IDENTIFICATION LETTERS.

Its unique design gives you total flexibility as it enables the use of bespoke fonts, shapes, colours and sizes.

The ILLUMALETTER® can be cut-in and set flush in architrave uprights or in headers above the lift entrance. ILLUMALETTER® can also be surface-mounted or semi-recessed. The range is constructed and designed to be demountable for future maintenance without disrupting the surrounding finishes.



ILLUMALLETTER®



Face Illumination (F)

- Thickness of material (depth): 25 / 30mm
- Reverse (back): Painted (no illumination)
- Face: Full Illumination
- Sides: Painted (no illumination)
- Ideal for sitting flush with wall finish



Partial Sides & Partial Face Illumination(PS-PF)

- Thickness of material (depth): 10 / 20 / 30mm
- Reverse (back): Painted (no illumination)
- Face: Opaque Acrylic, Stainless Steel, Aluminium, Brass
- Sides: 10mm minimum from rear painted (no illumination) remaining side illuminate



Face & Partial Side Illumination (F-PS)

- Thickness of material (depth): 23 / 30mm
- Reverse (back): Painted (no illumination)
- Face: Full Illumination
- Sides: 10mm minimum from rear painted (no illumination), remaining side illuminated



Rear Face (RF-PS) & Partial Side Illumination

- Thickness of material (depth): 10 / 20 / 30mm
- Reverse (back): Halo illuminated
- Face: Painted, Stainless Steel, Aluminium, Brass
- Sides: 10mm minimum from front painted (no illumination), remaining side illuminated



Rear Halo (RH)

- Thickness of material (depth): 10 / 20 / 30mm
- Reverse (back): Halo illuminated
- Face: Painted, Stainless Steel, Aluminium, Brass
- Sides: Painted, Stainless Steel, Aluminium, Brass

General letter specifications

- Letters are manufactured to any bespoke font or sizes
- Acrylic thicknesses available 10mm, 20mm & 30mm with some letter profiles 23mm
- Minimum letter stroke widths required 12mm or 14mm depending on letter profile
- All LEDs are 12 Volts
- Standard LED colours available in range of cool and warm whites, red, green, orange, blue and yellow illumalletters
- Some illumalletters are available with an RGB colour changing option
- Letters & LEDs warranted for two years
- Supplied with IP68 rated 12 Volt power supplies, warranted for one year
- Options available for setting letters flush in architrave or transom, semi-recessed

